

HSF



ROHS

SPECIFICATION

Current Rating:	3.0 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black

Ordering Code:

FHER04 - X - X - S - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No.of Contacts
01 To 40

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
S:Single

⑤ Plastic High:
H:3.4



Please mark the desired length in the H

⑥ Insulator Material


A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

⑦ Packing

A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

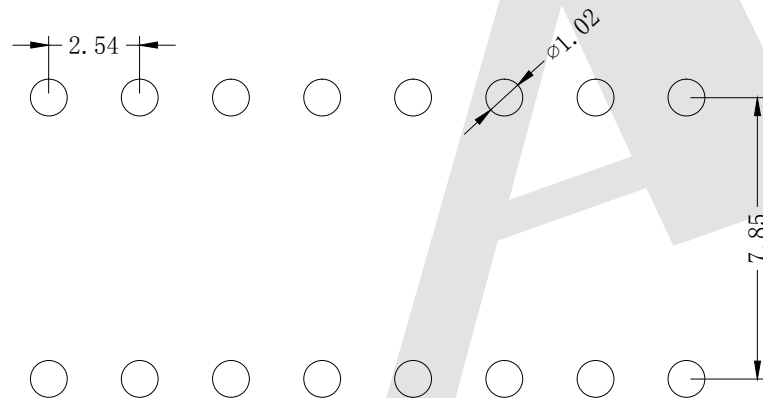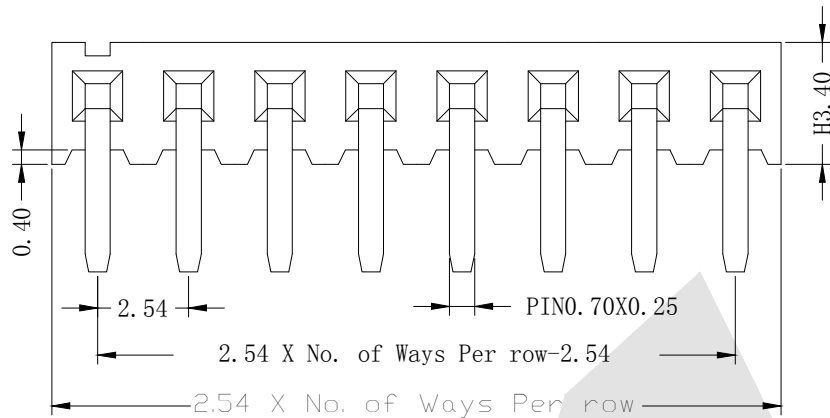


PCB LAYOUT

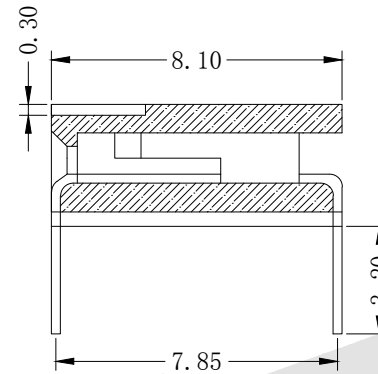

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang



3rd ANGLE PROJECTION

UNIT:
mm
DATE
01/05/2016
DATE
01/05/2016



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

2.54mm Female Header Single Row Angle Side Entry Type

DRAWING NO: FHER04-XXSXXX

PRODUCT NO: FHER04-XXSXXX

REV

DESCRIPTION

DATE